NOTES:


- 1. ALLOWABLE OPTICAL MATERIAL: SCHOTT: Fused Silica 458/678
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO < 3 ARCMIN
- 3. COATING (APPLY ACROSS COATING APERTURE)

\$1: PROTECTED GOLD Ravg ≥ 94% 700-800nm @ 0° AOI Ravg ≥ 97% 800-2,000nm @ 0° AOI

S2: NONE

4.\ ARROW ON EDGE POINTING TOWARDS SURFACE \$1.

5. FINE GROUND SURFACE

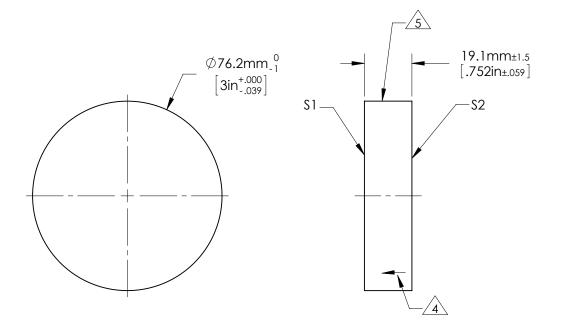

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2	EFL (AT 587.6nm)	NA	Edmund Optics ®	
SHAPE	PLANO	PLANO				
SURFACE ACCURACY AT 632.8nm	1/20 WAVE	NA				
SURFACE QUALITY	60 - 40	COMMERCIAL POLISH	BFL (AT 587.6nm)	NA	TITLE	1/20\text{\text{Optical Flat, Fused Silica, 3inch Diameter PROTECTED GOLD}
CLEAR APERTURE	Ø 68.6	Ø 68.6				
BEVEL MAX FACE	1.0 x 45°	1.0 x 45°	ALL DIMS IN	mm	DWG NO	47573-566