


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

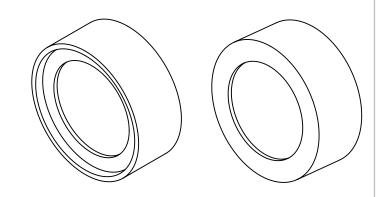



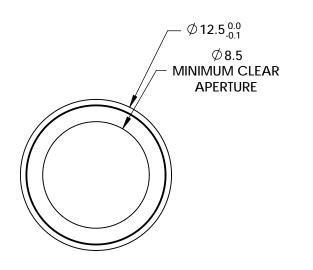

	< →	$-5.00_{\pm 0.10}$
		ı

REV. 001	VALUE			
CENTER WAVELENGTH (CWL)	340 ± 2nm			
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm			
MINIMUM TRANSMISSION	≥85 %			
BLOCKING	200 - 1200nm			
SURFACE QUALITY	80-50			
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING			
COATING TYPE	HARD COATED			
DURABILITY	MIL-C-48497A, SECT. 3.4.1			
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4			

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		Edmund Optics®		
THIRD ANGLE PROJECTION		TITLE	OD4, Ø12.5mm, 340nm x 10nm, HC, BP	FILTER
ALL DIMS IN	mm	DWG NO	65068	SHEET 1 OF 1