


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

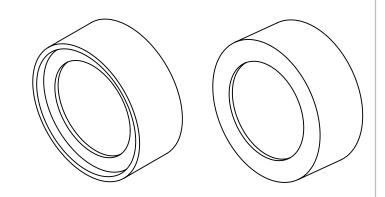



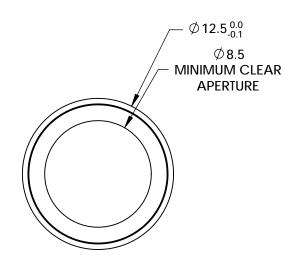

-	- 5.00±0.10
	l

\neg	R I		^ ^	2			$\overline{}$	•
ВΑ	ИI	IJŀ	Α	SS	ΗII	ш	Ρh	′

REV. 001	VALUE
CENTER WAVELENGTH (CWL)	458 ± 2nm
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm
MINIMUM TRANSMISSION	≥85 %
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECT. 3.4.1
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		Edmund Optics®
1		OD4 Ø12 5mm 458nm x 10nm HC BP FILTER

					,3
<u>`</u>	THIRD ANGLE _ PROJECTION	$\bigoplus_{}$	TITLE	OD4, Ø12.5mm, 458nm x 10nm, HC, BP	FILTER
	ALL DIMS IN	mm	DWG NO	65081	SHEET 1 OF 1