



FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

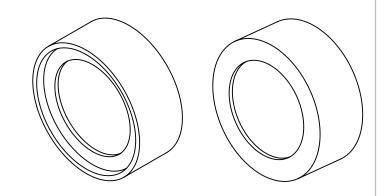

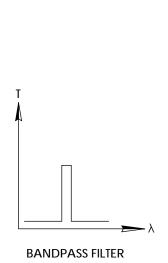

ENVIRONMENTAL

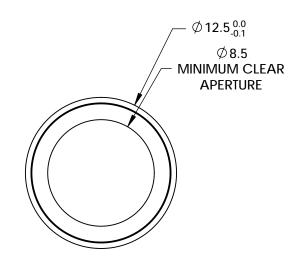



REV. 001	VALUE
CENTER WAVELENGTH (CWL)	500 ± 2nm
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm
MINIMUM TRANSMISSION	≥85 %
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECT. 3.4.1

MIL-STD-801F, SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		Edmund Optics®			
THIRD ANGLE - PROJECTION		TITLE	OD4, Ø12.5mm, 500nm x 10nm, HC, BP	FILTER	
ALL DIMS IN	mm	DWG NO	65088	SHEET 1 OF 1	