


## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

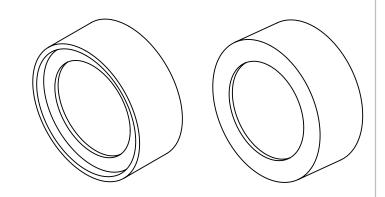



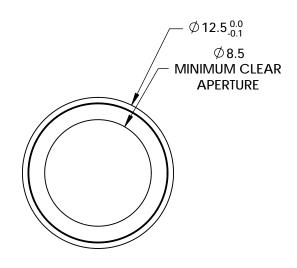

-	- <b>5.00</b> ±0.10

R Z	Λ.	ID	ΡΔ	SS	FI	1.7	ΓFΙ	Ş
$\nu$	<b>۱۱</b> ۱	טו	_	ເວວ		_	ட	`

REV. 001	VALUE
CENTER WAVELENGTH (CWL)	690 ± 2nm
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm
MINIMUM TRANSMISSION	≥85 %
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECT. 3.4.1
ENVIRONMENTAL	MIL-STD-801F, SECT, 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			Edmund Option	S®
THIRD ANGLE PROJECTION		TITLE	OD4, Ø12.5mm, 690nm x 10nm, HC, BP	FILTER
ALL DIMS IN	mm	DWG NO	65113	SHEET 1 OF 1