NOTES:

4

5.

1. SUBSTRATE:


Fused Silica

- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO ≤3 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) S1: NONE

S2: NONE

ARROW ON EDGE POINTING TOWARDS SURFACE \$1

FINE GRIND SURFACE

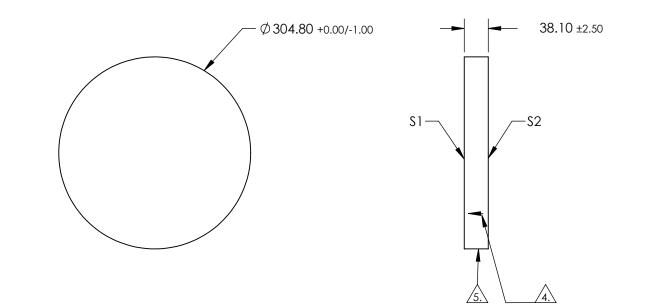

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PLANO	S2 PLANO			B	Edmund Optic	CS®
SURFACE ACCURACY AT 632.8nm	λ/10	N/A			TITLE	304.8mm Dia. λ /10 Fused Silica Optical Flat	
SURFACE QUALITY	60-40	COMMERCIAL POLISH					
CLEAR APERTURE	Ø274.30	Ø274.30		I			
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69921000	SHEET 1 OF 1