

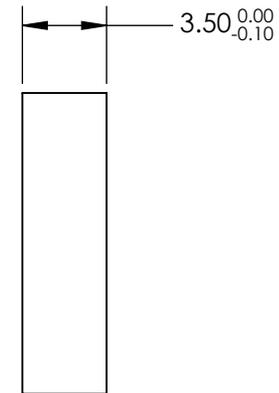
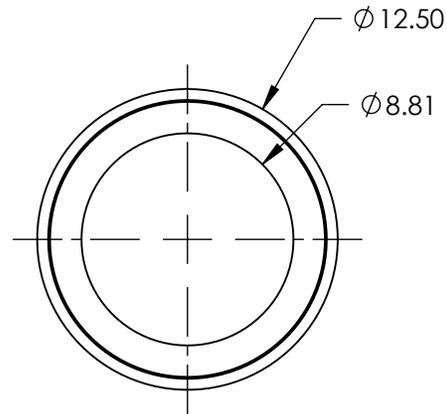


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**



BANDPASS FILTER

REV A	VALUE
CENTER WAVELENGTH (CWL)	1064 ± 2nm
FULL WIDTH HALF MAX (FWHM)	7.5± 2nm
MINIMUM TRANSMISSION	≥90 %
BLOCKING	979 - 1048 & 1080 - 1170
SURFACE QUALITY	60-40
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	DURABILITY: MIL-C-48497A SECT. 3.4.1
ENVIRONMENTAL	ENVIRONMENTAL: MIL-STD-810F SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY



ALL DIMS IN mm

TITLE	OD6, Ø12.5mm, 1064 nm CWL, 4 nm BANDWIDTH, LASER LINE BANDPASS FILTER
DWG NO	68954
SHEET 1 OF 1	