



NOTES:

1. SUBSTRATE:
N-BK7
2. COATING (APPLY ACROSS COATING APERTURE)
S1: Aluminum w/ Protective Overcoat
R(AVG)>85% FROM 400-700nm, @ 45° AOI

S2: NONE

 FINE GRIND SURFACE

4. RoHS COMPLIANT

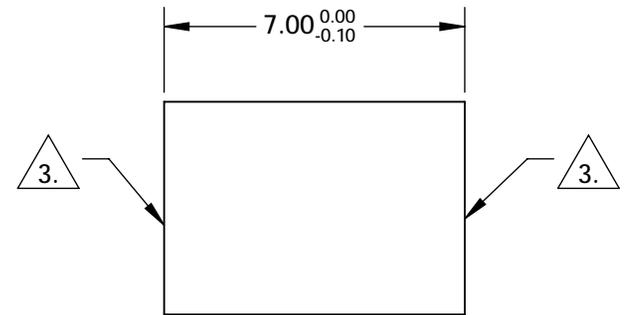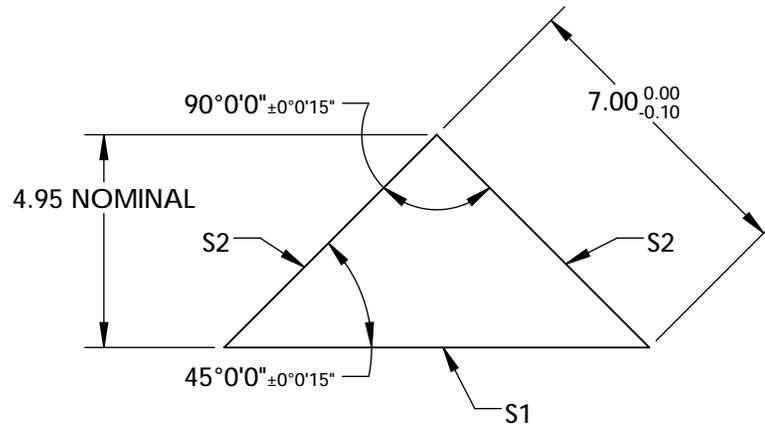


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	8.91 x 6.30	6.30 x 6.30
COATING APERTURE	8.91 x 6.30	6.30 x 6.30
SURFACE FLATNESS	$\lambda/8$	$\lambda/8$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE
PROJECTION



ALL DIMS IN

mm

 **Edmund Optics®**

TITLE

7mm, Aluminum Coated, N-BK7 High
Tolerance RA Prism

DWG NO

32542

SHEET
1 OF 1