NOTES:

1. SUBSTRATE:

N-BK7


- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN ≤3 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)


\$1: 50% R ±5% @ 900nm 50% T ±5% @ 900nm

S2: AR R(avg) ≤1%, R(abs) ≤2% @ 700 - 1100nm



5. ROHS COMPLIANT

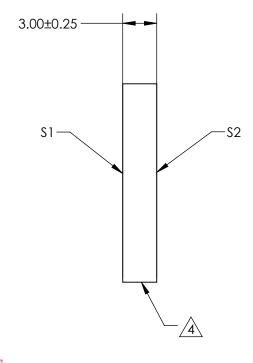

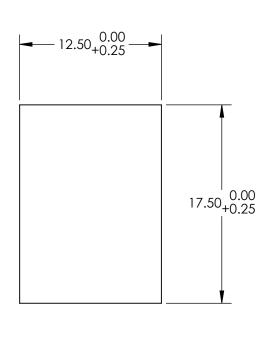

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SHAPE	PLANO	PLANO	
ANGLE OF INCIDENCE	45°	45°	
SURFACE QUALITY	60 - 40	60 - 40	
SURFACE FLATNESS	1λ PER 25mm	1λ PER 25mm	

		Edmund Optics®		
THIRD ANGLE PROJECTION	$\phi \lhd$	TITLE	12.5 x 17.5mm 50R/50T, NIR Plate Beam	splitter
ALL DIMS IN	mm	DWG NO	47025	SHEET 2 OF 49