
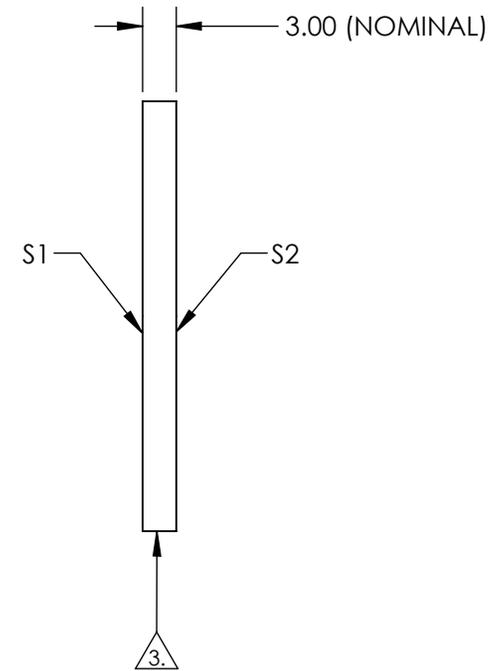


NOTES:


1. SUBSTRATE: Float Glass
2. COATING (APPLY ACROSS CLEAR APERTURE)
  - S1: Protected Silver (450-10000nm)
    - R(AVG) >98% @ 450 - 800nm
    - R(AVG) >98.5% @ 2000 - 10,000nm
  - S2: NONE
3.  EDGES GROUND
4. RoHS COMPLIANT

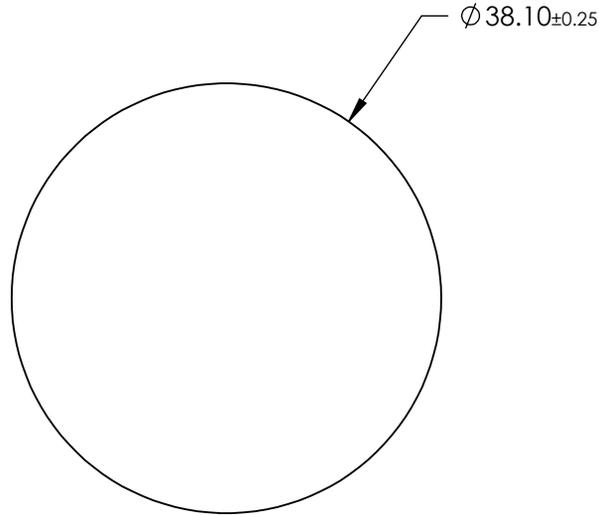

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	N/A
SURFACE FLATNESS	4 - 6λ	N/A
CLEAR APERTURE	Ø 36.20	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 <sup>®</sup> Edmund Optics<sup>®</sup>

TITLE

38.1mm Dia Protected Silver, 4-6λ Mirror

DWG NO

36045

SHEET  
1 OF 1