


- 1. SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE) S1: Protected Aluminum (400-700nm) R(AVG) >85% @ 400 - 700nm @ 45°

S2: NONE

3. GROUND EDGES

4. ROHS COMPLIANT

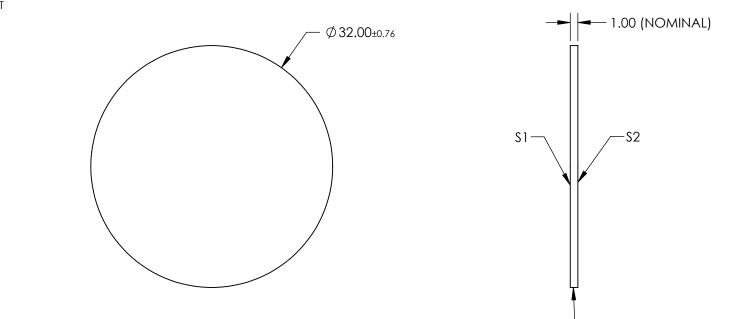

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

Shape	S1 PLANO	S2 PLANO				Edmund Optic	S®
SURFACE QUALITY	80-50	N/A			TITLE	32mm Diameter, 4-6λ Mirror	
SURFACE FLATNESS	4 - 6λ	N/A					
CLEAR APERTURE	Ø28.80	N/A		1			CUEET
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	46651	Sheet 1 Of 1