NOTES:


- SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE) \$1: Protected Aluminum (400-700nm) R(AVG) >85% @ 400 - 700nm @ 45°


S2: NONE



SEAMED EDGES

Rohs Compliant

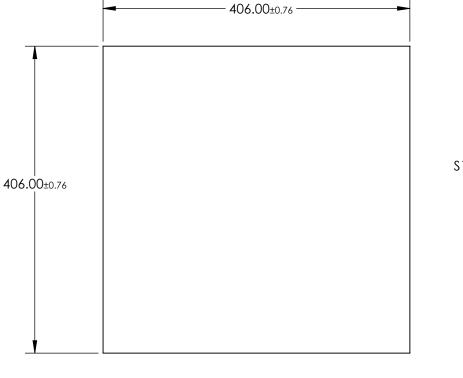

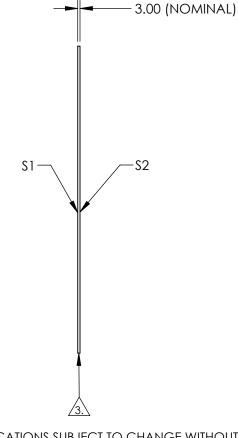

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PLANO	\$2 PLANO				Edmund Optic	S®
SURFACE QUALITY	80-50	N/A		1		406 x 406mm, 4-6λ Mirror	
SURFACE FLATNESS	4 - 6λ	N/A	THIRD ANGLE PROJECTION		TITLE	400 X 400Hill, 4 0X Willion	
CLEAR APERTURE	Ø 365.4 x 365.4	N/A		1			CUEET
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	46656	SHEET 1 OF 1