



NOTES:

1. SUBSTRATE:
N-BK7
2. S2 TO BE PARALLEL WITH S1 TO <1 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: RAVG $\leq 0.4\%$ @ 425 - 675nm

4. FINE GRIND SURFACE

5. RoHS COMPLIANT

6. SURFACE FLATNESS (P-V):
 $\lambda/4$ (per inch over clear aperture)

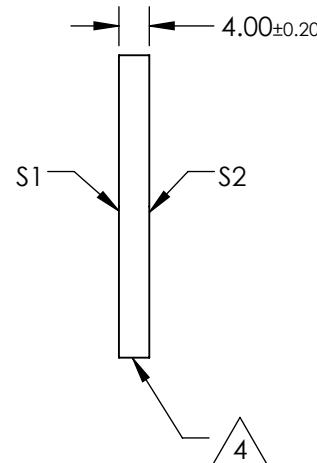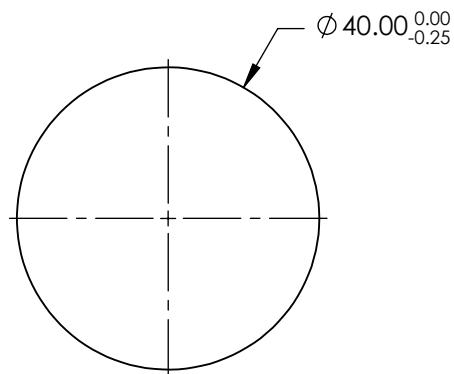

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	$\phi 36.00$	$\phi 36.00$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION	TITLE	40mm DIA., 4mm THICK, VIS 0° COATED $\lambda/4$ N-BK7 WINDOW	
ALL DIMS IN	mm	DWG NO	SHEET 1 OF 1
		47522	

Edmund Optics®