

NOTES:

- 1. SUBSTRATE: N-BK7
- 2. S2 TO BE PARALLEL WITH S1 TO <30 arcsec
- 3. COATING (APPLY ACROSS CLEAR APERTURE) S1 & S2: RAVG ≤1.75% @ 400 - 700nm



5. Rohs Compliant



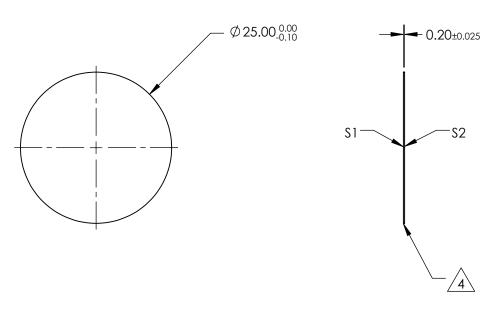

PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

> SHEET 1 OF 1

			_	
	\$1	\$2		
SHAPE	PLANO	PLANO		
SURFACE QUALITY	20-10	20-10	THIRD ANGLE PROJECTION	
WAVELENGTH RANGE	400 - 700nm	400 - 700nm		
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	

		Edmund Optics®		
THIRD ANGLE _ PROJECTION	\Diamond	TITLE	25mm DIAMETER MGF2 COATED, ULT THIN N-BK7 WINDOW	RA-
ALL DIMS IN	mm	DWG NO	66196	SHEET 1 OF