
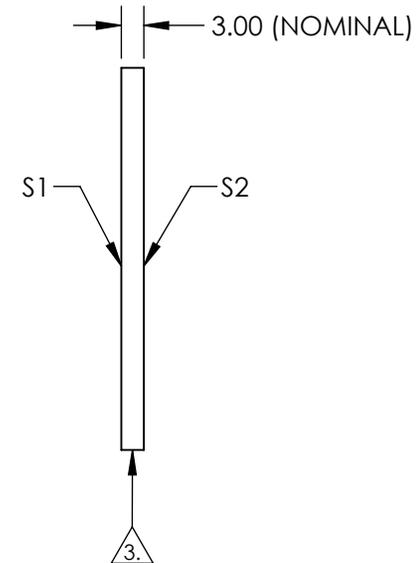


NOTES:

1. SUBSTRATE: Float Glass
2. COATING (APPLY ACROSS CLEAR APERTURE)
  - S1: Protected Silver (450-10000nm)  
R(AVG) >98% @ 450 - 800nm  
R(AVG) >98.5% @ 2000 - 10,000nm
  - S2: NONE
3.  EDGES SEAMED
4. ROHS COMPLIANT

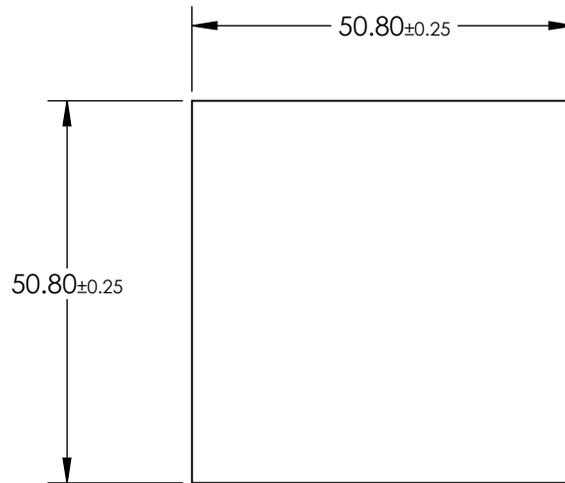

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

|                  | S1                  | S2                  |
|------------------|---------------------|---------------------|
| SHAPE            | PLANO               | PLANO               |
| SURFACE QUALITY  | 60-40               | N/A                 |
| SURFACE FLATNESS | 4 - $6\lambda$      | N/A                 |
| CLEAR APERTURE   | 48.26 x 48.26       | N/A                 |
| BEVEL            | PROTECTED AS NEEDED | PROTECTED AS NEEDED |



ALL DIMS IN mm

 **Edmund Optics<sup>®</sup>**

TITLE

50.8 x 50.8mm Protected Silver, 4- $6\lambda$  Mirror

DWG NO

36050

SHEET  
1 OF 1