NOTES:


1. SUBSTRATE MATERIAL: N-BK7


2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS 0° (425-675nm) R(AVG) ≤0.4% @ 425 - 675nm

3. FINE GROUND SURFACE

4. Rohs Compliant

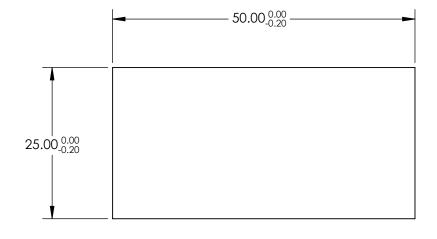

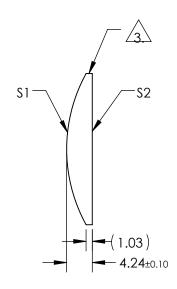

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	EFL	50.00		Edmund Ontice
SHAPE	CONVEX	PLANO	BFL	47.2		Edmund Optics®
RADIUS	25.93	INFINITY				25mm H X 50mm L X 50mm FL VIS 0° COATED,
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION	\bigcirc	TITLE	CYLINDER LENS
CLEAR APERTURE	24.00 x 49.00	24.00 x 49.00		I		
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	69732 SHEET 1 OF 1