


NOTES:


1. SUBSTRATE:
D-ZLAF52LA
2. NUMERICAL APERTURE:
OBJECT: 0.26
IMAGE: 0.52
WD, IMAGE(mm): 7.09
3. COATING
S1 & S2: R(ABS) < 1.0% @ 600 - 1050nm
4. FOCAL LENGTH TOLERANCE: ±1%
5. TRANSMITTED WAVEFRONT ERROR (λ , RMS): < 0.200
6. MAGNIFICATION: 2X

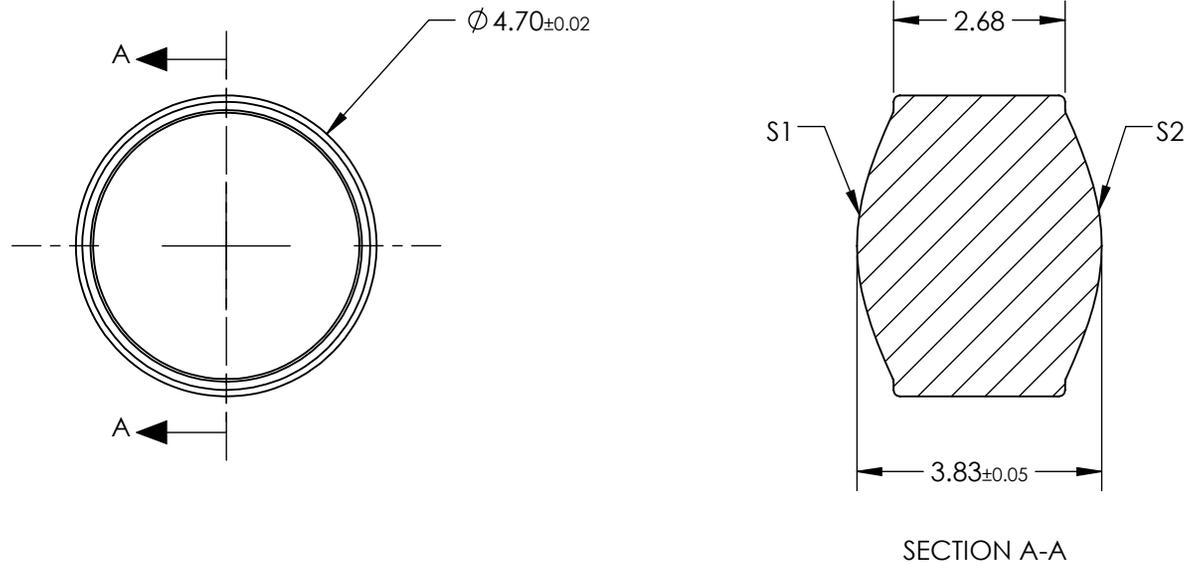

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |
|-----------------|----------------------|----------------------|
| SHAPE | CONVEX | CONVEX |
| SURFACE QUALITY | 40-20 | 40-20 |
| CLEAR APERTURE | Ø4.12 | Ø4.12 |
| BEVEL MAX | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED |

| | | | |
|------------------------|---|---|--|
| EFL | 2.76 |  Edmund Optics® | |
| BFL | 2.70 | | |
| THIRD ANGLE PROJECTION |  | TITLE | 0.52 NA 2.76mm FL 600-1050nm AR COATED, MOLDED ASPHERIC LENS |
| ALL DIMS IN | mm | DWG NO | 87134 |
| | | | SHEET 1 OF 1 |