
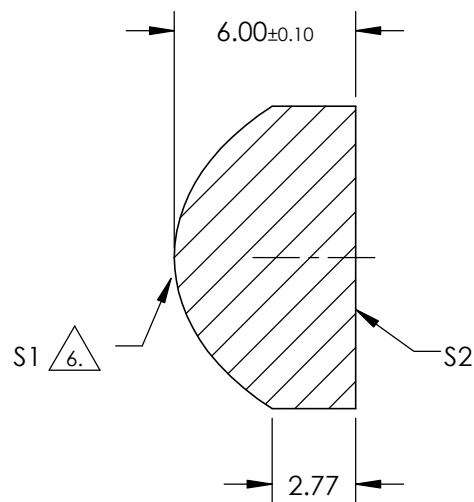


NOTES:

1. SUBSTRATE: FUSED SILICA
2. COATING (APPLY ACROSS CLEAR APERTURE)
S1: R(avg) <1.5% @ 425 - 675nm
S2: R(avg) <1.5% @ 425 - 675nm
3. EDGES: FINE GROUND
4. CENTERING: <3-5 ARCMIN
5. ASPHERE FIGURE ERROR: 0.75µm RMS

6.  ASPHERIC SURFACE DESCRIBED BY (REF. COEFFICIENT TABLE)

$$Z_{ASPH}(Y) = \frac{(\frac{1}{RADIUS}) * Y^2}{1 + \sqrt{1 - (1+k) * (\frac{1}{RADIUS})^2 * Y^2}} + D * Y^2 + E * Y^4 + F * Y^6 + G * Y^8 + H * Y^{10} + J * Y^{12} + L * Y^{14}$$

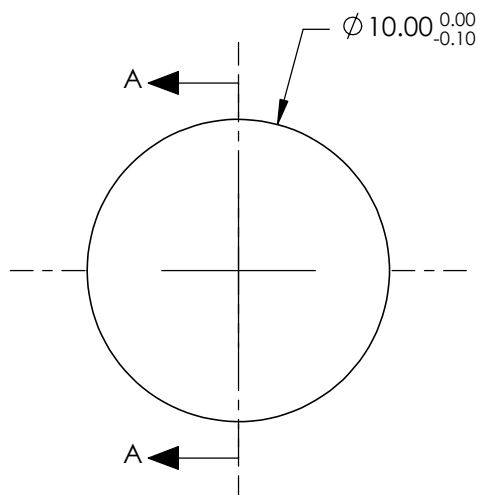


SECTION A-A

COEFFICIENT TABLE 

COEFFICIENT	S1
k	-0.632906
D	0
E	0.00012823215
F	1.5211816e-006
G	3.3940061e-008
H	0
J	0
L	0

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL @ 587.6nm	10	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL @ 587.6nm	5.89			
RADIUS	4.585	INFINITY	THIRD ANGLE PROJECTION		TITLE	10mm DIA 0.50 NA VIS COATED, UV FUSED SILICA ASPHERIC LENS	
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	90%	90%	ALL DIMS INmm		DWG NO	87986	
BEVEL MAX	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED					
					SHEET 1 OF 1		

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**