## NOTES:

1. SUBSTRATE MATERIAL: N-BK7


2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: NONE



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. Rohs Compliant



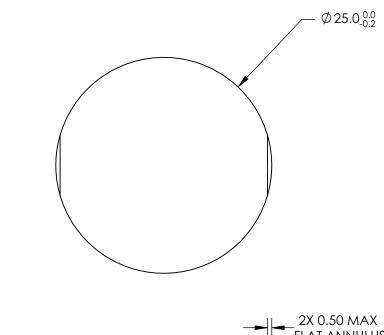

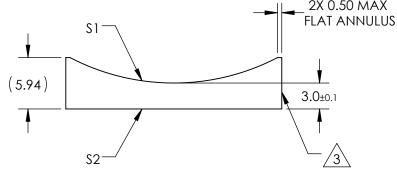

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2				
SHAPE	CONVEX	PLANO	EFL	-50		Edmund Ontice
RADIUS	-25.93	∞	BFL	-51.97		Edmund Optics®
SURFACE QUALITY	60-40	60-40				25mm DIA X -50mm FL UNCOATED, CYLINDER
CLEAR APERTURE	Ø24.00	Ø24.00	THIRD ANGLE PROJECTION	$\bigcirc$	TITLE	LENS
COATING APERTURE	Ø24.00	Ø24.00		1		
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	46197 SHEE 1 OF