

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR

R(abs) ≤ 0.25% @ 880nm




R(avg) ≤ 1.25% @ 400 - 870nm

R(avg) ≤ 1.25% @ 890 - 1000nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

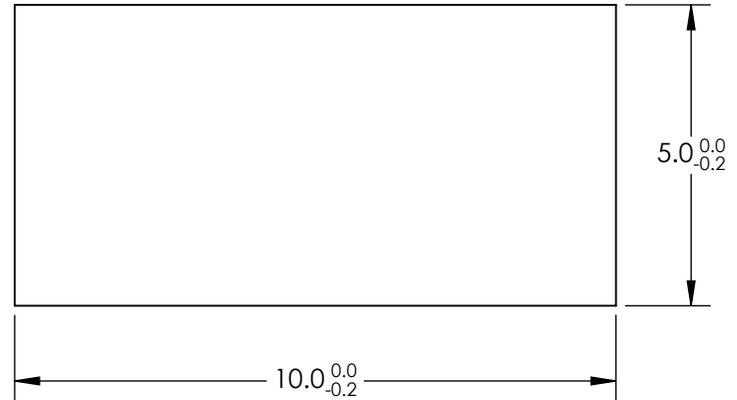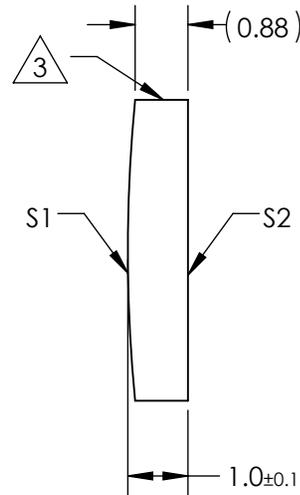

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	50	 Edmund Optics®	
SHAPE	CONVEX	PLANO	BFL	49.34		
RADIUS	25.8	∞	THIRD ANGLE PROJECTION 		TITLE	5mm H X 10mm L X 50mm FL VIS-NIR COATED, CYLINDER LENS
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	47960
CLEAR APERTURE	9.00 X 4.00	9.00 X 4.00	SHEET 1 OF 1			
COATING APERTURE	9.00 X 4.00	9.00 X 4.00				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				