

NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: VIS-NIR

R(abs) ≤0.25% @ 880nm  
R(avg) ≤1.25% @ 400 - 870nm  
R(avg) ≤1.25% @ 890 - 1000nm




3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY  
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

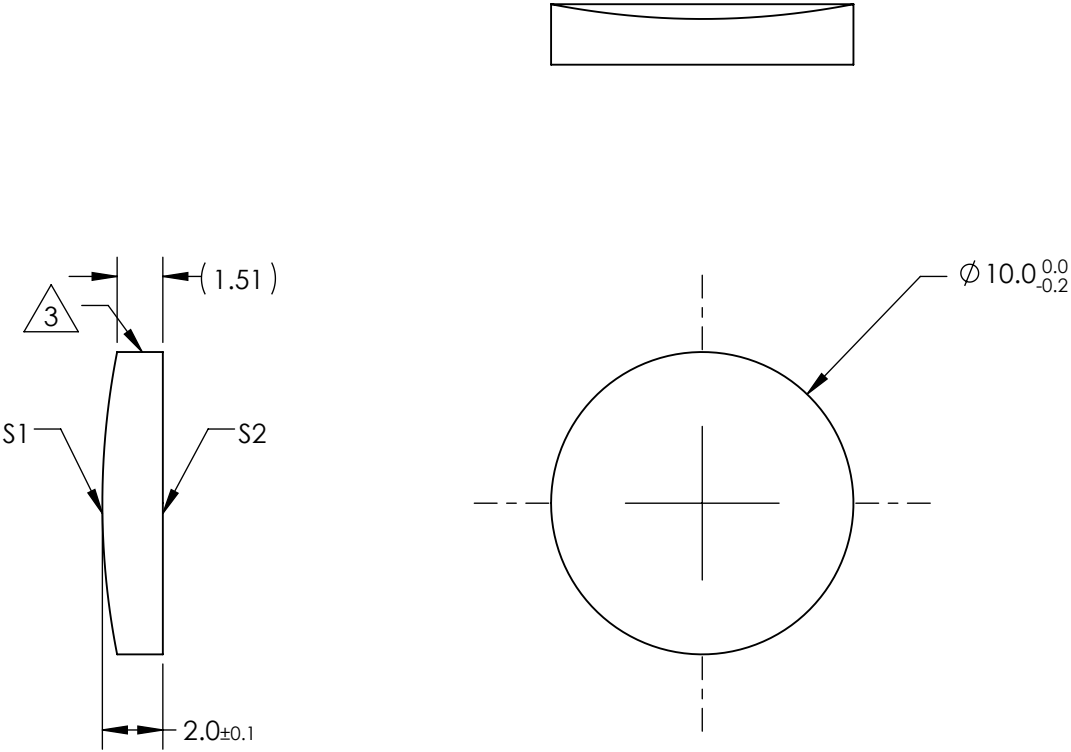

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®			
SHAPE	CONVEX	PLANO				
RADIUS	25.84	∞	EFL	50	BFL	48.68
SURFACE QUALITY	60-40	60-40			TITLE	10mm DIA X 50mm FL VIS-NIR COATED, CYLINDER LENS
CLEAR APERTURE	Ø9.00	Ø9.00				
COATING APERTURE	Ø9.00	Ø9.00			DWG NO	47964
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				
			ALL DIMS IN	mm	SHEET 1 OF 1	