NOTES:

1. SUBSTRATE MATERIAL: N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. Rohs Compliant



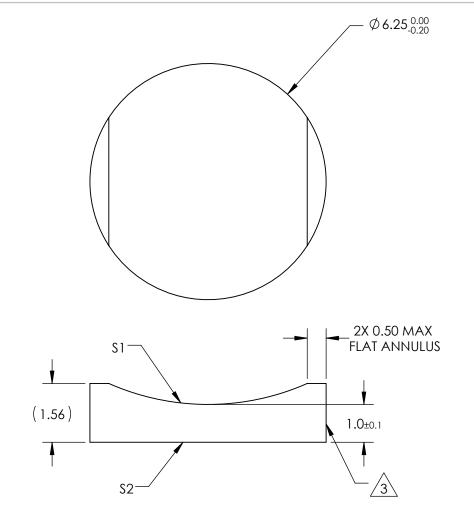

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| REV. A | S1 | S2 | | | | | |
|------------------|---------------------|---------------------|------------------------|--------|----------------|---|-----------------|
| SHAPE | CONVEX | PLANO | EFL | -12.5 | | Edmund Ontion | \ ∩® |
| RADIUS | -6.48 | ∞ | BFL | -13.16 | Edmund Optics® | | |
| SURFACE QUALITY | 60-40 | 60-40 | THIRD ANGLE PROJECTION | | TITLE | 6.25mm DIA X -12.5mm FL MgF2 COATED, CYLINDER LENS | |
| CLEAR APERTURE | Ø 5.25 | Ø 5.25 | | | | | |
| COATING APERTURE | Ø 5.25 | Ø 5.25 | | | | | |
| BEVEL | PROTECTED AS NEEDED | PROTECTED AS NEEDED | ALL DIMS IN | mm | DWG NO | 48372 | SHEET 1 OF 1 |