

NOTES:

1. SUBSTRATE MATERIAL:
N-SF11

2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

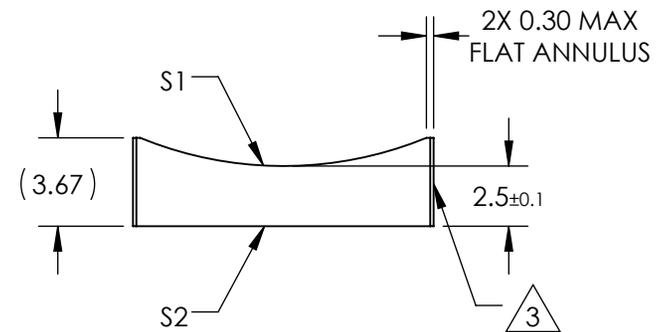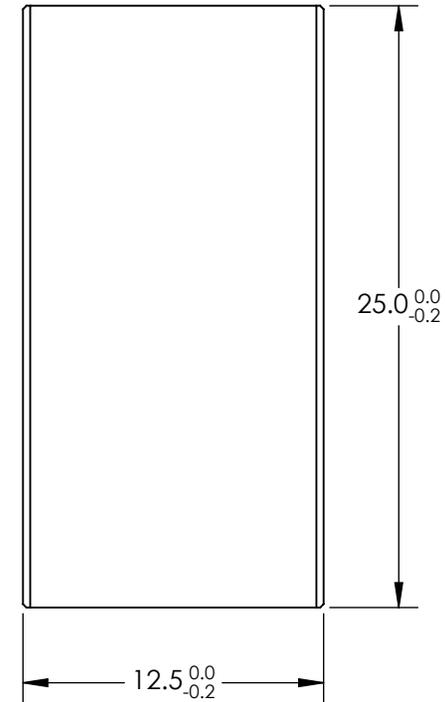

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	-20	 Edmund Optics®
SHAPE	CONVEX	PLANO	BFL	-21.4	
RADIUS	-15.69	∞	THIRD ANGLE PROJECTION 		TITLE
SURFACE QUALITY	60-40	60-40	ALL DIMS IN		mm
CLEAR APERTURE	11.50 X 24.00	11.50 X 24.00	DWG NO		68071
COATING APERTURE	11.50 X 24.00	11.50 X 24.00	SHEET		1 OF 1
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	12.5mm H X 25mm L X -20mm FL MgF2 COATED, CYLINDER LENS		