

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: VIS 0°

R(avg) ≤0.4% @ 425 - 675nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

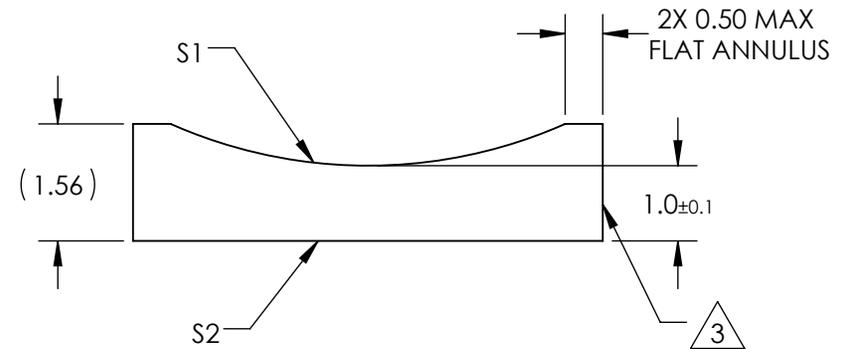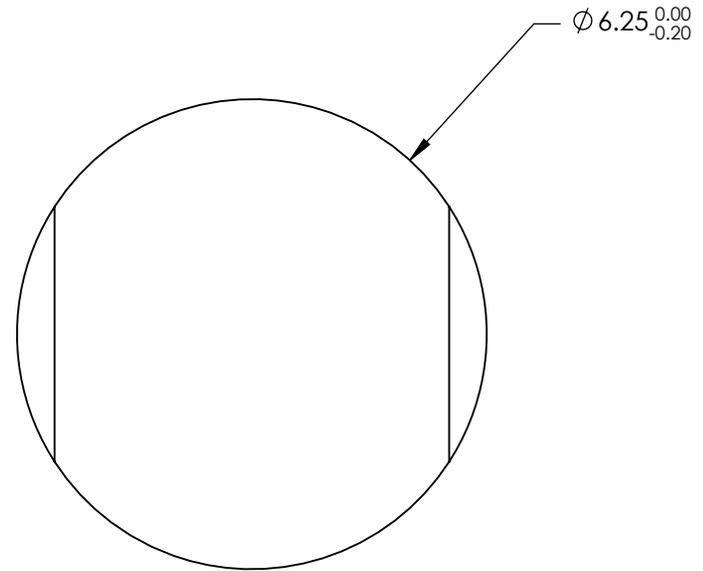

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	-12.5	 Edmund Optics®	
SHAPE	CONVEX	PLANO	BFL	-13.46		
RADIUS	-6.48	∞	THIRD ANGLE PROJECTION 		TITLE	6.25mm DIA X -12.5mm FL VIS 0° COATED, CYLINDER LENS
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	69791
CLEAR APERTURE	∅ 5.25	∅ 5.25	SHEET 1 OF 1			
COATING APERTURE	∅ 5.25	∅ 5.25				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				