
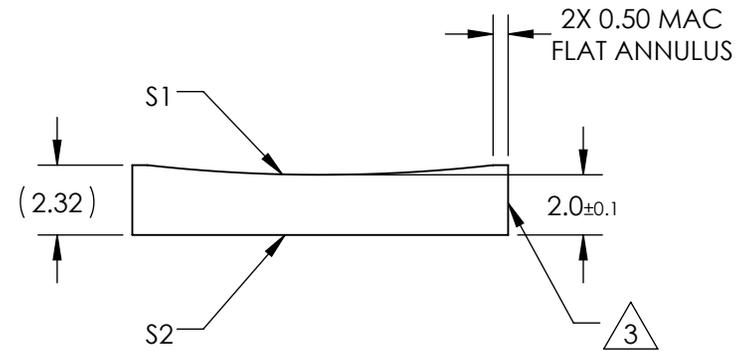


NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)  
  
S1 & S2: VIS 0°  
  
R(avg) ≤0.4% @ 425 - 675nm


3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

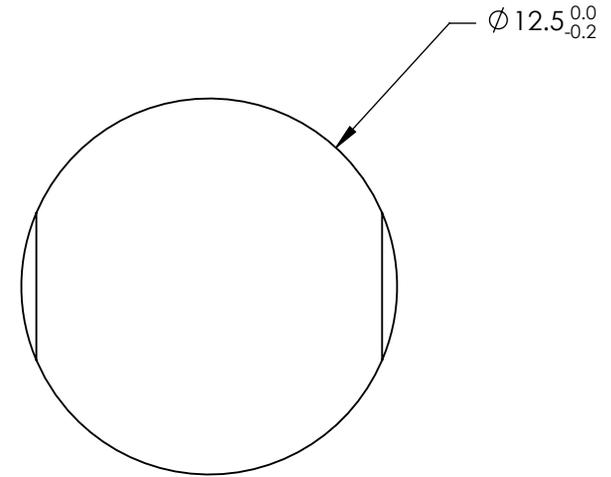

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	-100	 <b>Edmund Optics®</b>		
SHAPE	CONVEX	PLANO	BFL	-101.35			
RADIUS	-51.68	∞	THIRD ANGLE PROJECTION		TITLE	12.5mm DIA X -100mm FL VIS 0° COATED, CYLINDER LENS	
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	69796	SHEET 1 OF 1
CLEAR APERTURE	Ø11.50	Ø11.50					
COATING APERTURE	Ø11.50	Ø11.50					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					