NOTES:


- 1. SUBSTRATE MATERIAL: N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. RoHS COMPLIANT

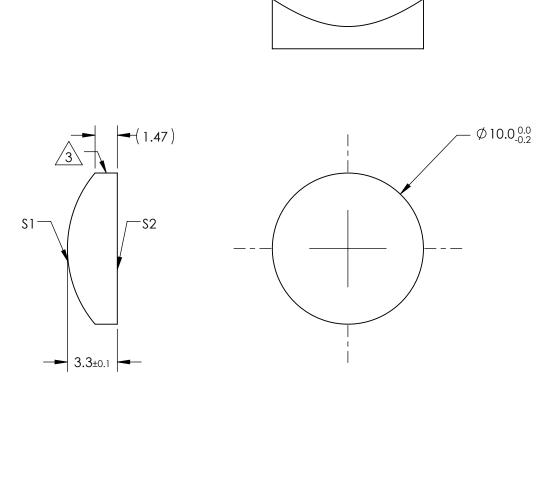



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	15		Edmund Onti	
RADIUS	7.75	∞	BFL	12.82	Edmund Optics [®]		
SURFACE QUALITY	60-40	60-40		I		10mm DIA X 15mm FL MgF2 COA1	FD
CLEAR APERTURE	Ø9.00	Ø9.00			TITLE	CYLINDER LENS	
COATING APERTURE	Ø9.00	Ø9.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	47767	SHEET 1 OF 1