

NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR

R(abs)  $\leq 0.25\%$  @ 880nm



R(avg)  $\leq 1.25\%$  @ 400 - 870nm

R(avg)  $\leq 1.25\%$  @ 890 - 1000nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

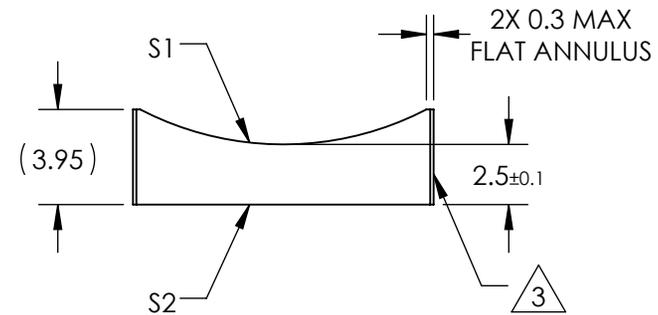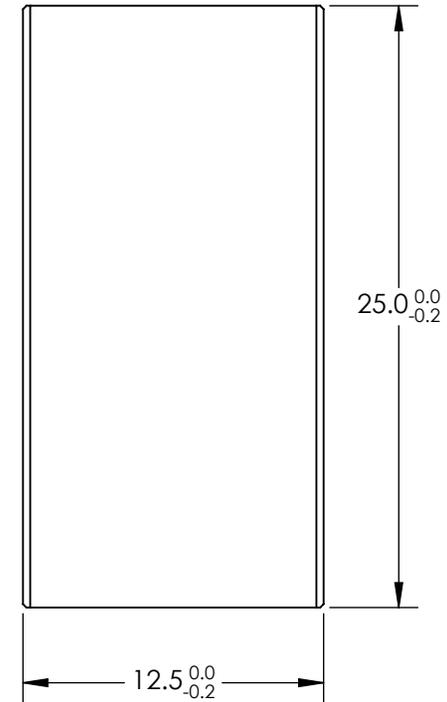

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	-25	 <b>Edmund Optics®</b>	
SHAPE	CONVEX	PLANO	BFL	-26.65		
RADIUS	12.92	$\infty$	THIRD ANGLE PROJECTION 		TITLE	12.5mm H X 25mm L X -25mm FL VIS-NIR COATED, CYLINDER LENS
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	69838
CLEAR APERTURE	11.50 X 24.00	11.50 X 24.00	SHEET 1 OF 1			
COATING APERTURE	11.50 X 24.00	11.50 X 24.00				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				