

NOTES:



1. SUBSTRATE MATERIAL:
FUSED SILICA
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1: Broadband Dielectric
R(avg) >98% @ 750 - 1100nm (0 - 45°) ALL POLARIZATIONS
R(avg) >99% @ 750 - 1100nm (0°) ALL POLARIZATIONS
S2: NONE

 FINE GROUND SURFACE


4. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

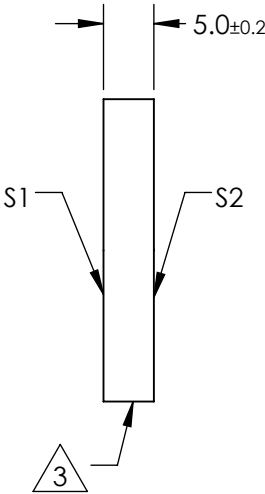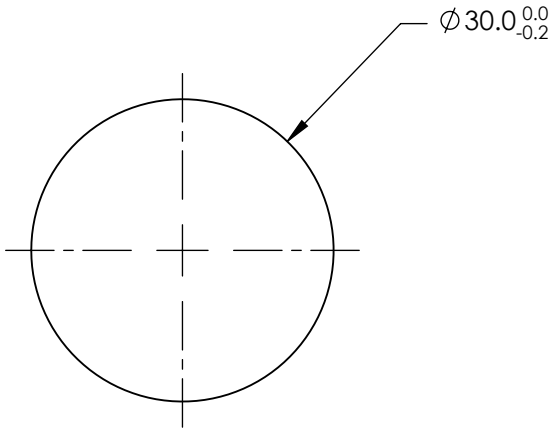


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
CLEAR APERTURE (%)	90	N/A
SURFACE QUALITY	20-10	COMMERCIAL POLISH
SURFACE FLATNESS	λ/10 (BEFORE COATING)	N/A
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



TITLE	Ø30mm, 750 - 1100nm BROADBAND λ/10 MIRROR		
DWG NO	87382	SHEET 1 OF 1	

THIRD ANGLE PROJECTION 

ALL DIMS IN	mm
-------------	----