
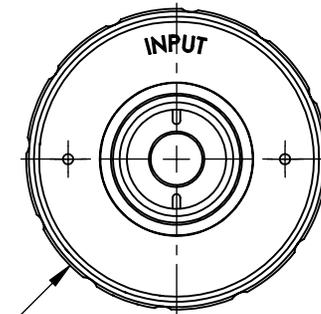
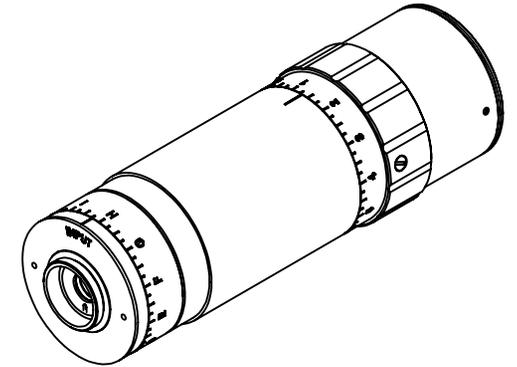
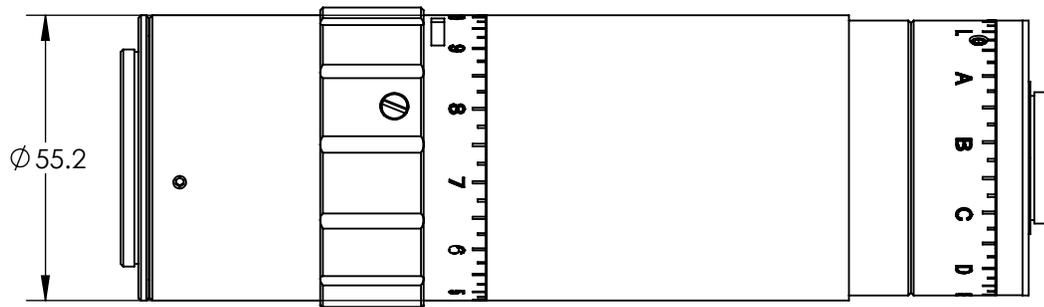


NOTES:

1. COATING (APPLY ACROSS CLEAR APERTURE)
NIR LASER
R(avg) < 1% @ 750 - 1100 nm
2. RoHS COMPLIANT

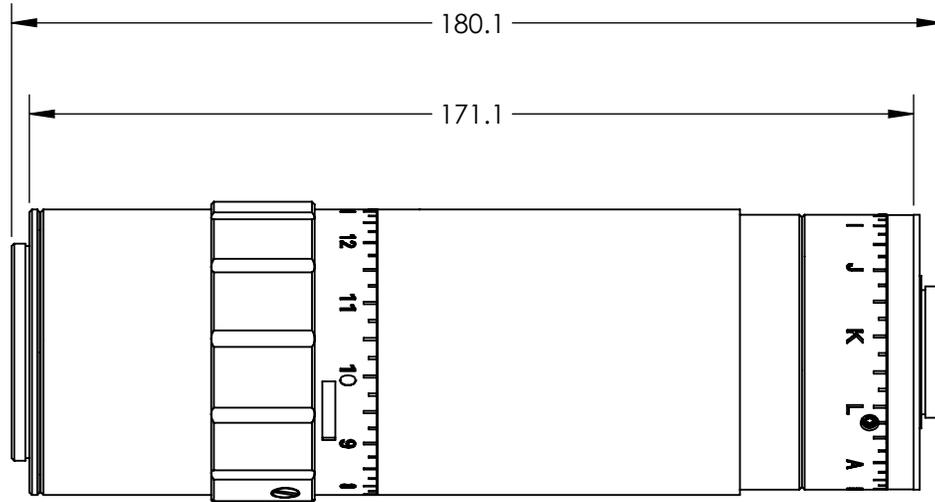


Ø 58.2

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

DESIGN WAVELENGTH DWL (nm)	785	THIRD ANGLE PROJECTION	TITLE	BROADBAND NIR 1X - 3X VARIABLE BEAM EXPANDER	
TRANSMISSION	>95% @ DWL		DWG NO	87564	SHEET 1 OF 1
TRANSMITTED WAVEFRONT, P-V	<λ/5 @ 785nm for Input Beam ≤5mm		ALL DIMS IN	mm	