

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 17° 27' NOMINAL BLAZE WAVELENGTH: 500nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant

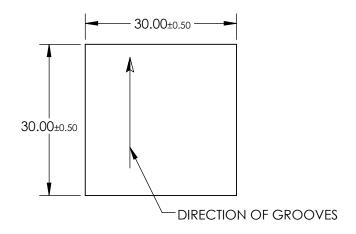

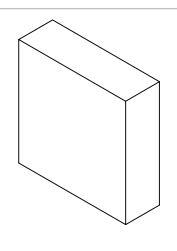



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2	
SHAPE	PLANO	PLANO	
CLEAR APERTURE	27.0 x 27.0	27.0 x 27.0	
	•		

	dmund	Optics®
--	-------	---------

THIRD ANGLE PROJECTION		TITLE	GRATING DIFF 1200GR 500nm 30 x 3	30
ALL DIMS IN	mm	DWG NO	46077	SHEET 1 OF 1