

## NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 13° 00' NOMINAL BLAZE WAVELENGTH: 500nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



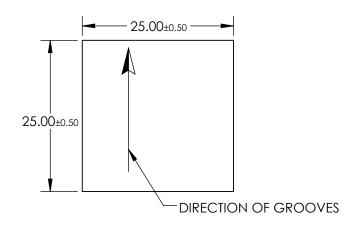



## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

81	Edmund	Optics®

S1 S2 THIRD ANGLE TITLE GRATING DIFF 900GR 500nm 25x2	
31 32 PROJECTION $\psi$	
SHAPE PLANO PLANO	CLIEFT
CLEAR APERTURE         22.5 x 22.5         ALL DIMS IN mm         DWG NO         64404	SHEET 1 OF 1