## NOTES:

1. SUBSTRATE:

LOW DISPERSION POLYMER

2. ABBE NUMBER(Vd): 100

3. COATING: BBAR (400 - 700nm)

4. FOCUS RANGE: +5 to +10 DIOPTER

5. TRANSMITTED WAVEFRONT ERROR, RMS:


VERTICAL: 0.15λ @ 525nm HORIZONTAL: 0.25λ @ 525nm

6. DAMAGE THRESHOLD, CW: 10 kW/cm<sup>2</sup> @ 1064nm

7. ROHS COMPLIANT





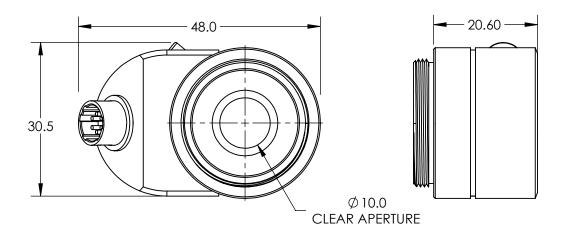

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY



| THIRD ANGLE PROJECTION |    | TITLE  | +5 TO +10 DIOPTERS, VIS COATED, FOCUS<br>TUNABLE LENS |                 |
|------------------------|----|--------|---|-----------------|
| ALL DIMS IN            | mm | DWG NO | 88937   | SHEET<br>1 OF 1 |