

NOTES:

1. SUBSTRATE MATERIAL:
N-SF11

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1: R(avg) ≤0.5% @ 600 - 1050nm

S2: R(avg) ≤0.5% @ 600 - 1050nm



S3: NONE

3. FINE GRIND SURFACE

4. DESIGN WAVELENGTH (DWL): 0nm

5. SET OF 2 PRISMS

6. RoHS COMPLIANT

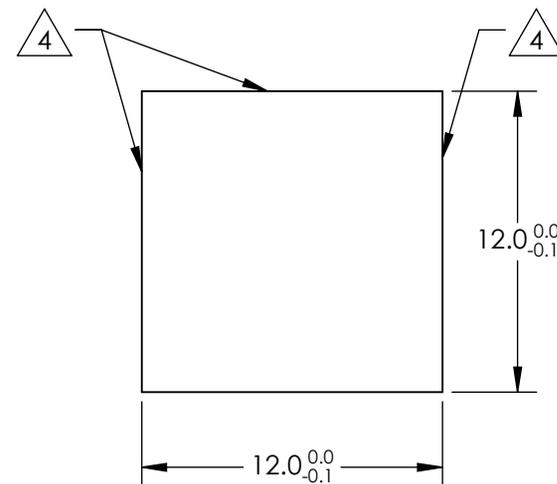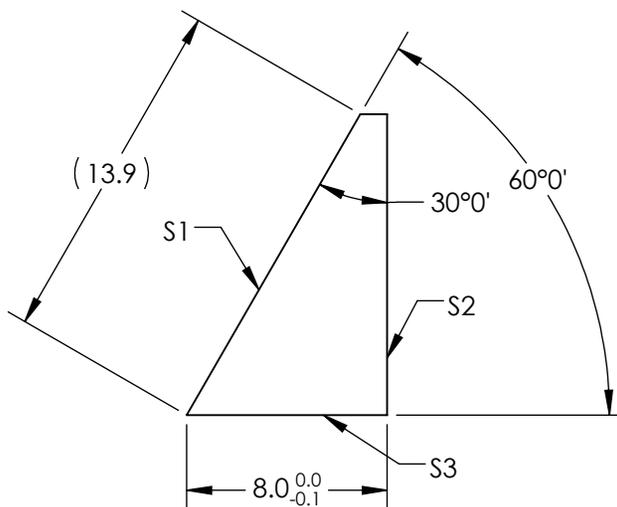


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	S3
SHAPE	PLANO	PLANO	PLANO
SURFACE FLATNESS	1/10 WAVE	1/10 WAVE	1/10 WAVE
SURFACE QUALITY	20-10	20-10	20-10
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

EO® Edmund Optics®

TITLE

NIR I COATED, UNMOUNTED ANAMORPHIC PRISM PAIR

DWG NO

47244

SHEET 1 OF 1