
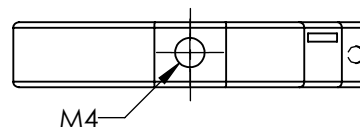
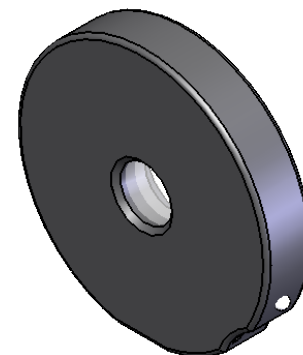
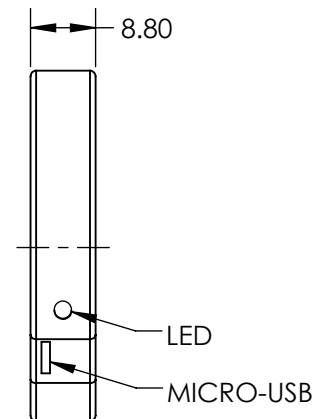


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

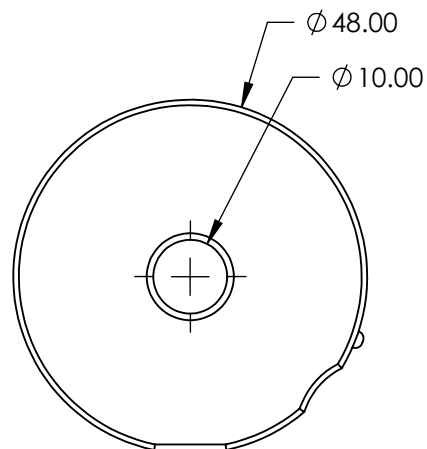

| | |
|----------------------------|------------|
| WAVELENGTH RANGE(nm) | 400 - 700 |
| DIFFUSING ANGLE (°) | 6 |
| CLEAR APERTURE CA (mm) | 10 |
| FREQUENCY (Hz) | 180 |
| POWER SUPPLY | Micro-USB |
| OPERATING VOLTAGE (V) | 5 |
| OPERATING TEMPERATURE (°C) | -20 to 65 |
| STORAGE TEMPERATURE (°C) | -40 to 100 |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



THIRD ANGLE
PROJECTION

TITLE

6° Diffusion Angle, 10mm CA Laser Speckle
Reducer, VIS

ALL DIMS IN

mm

DWG NO

88394

SHEET
1 OF 1