
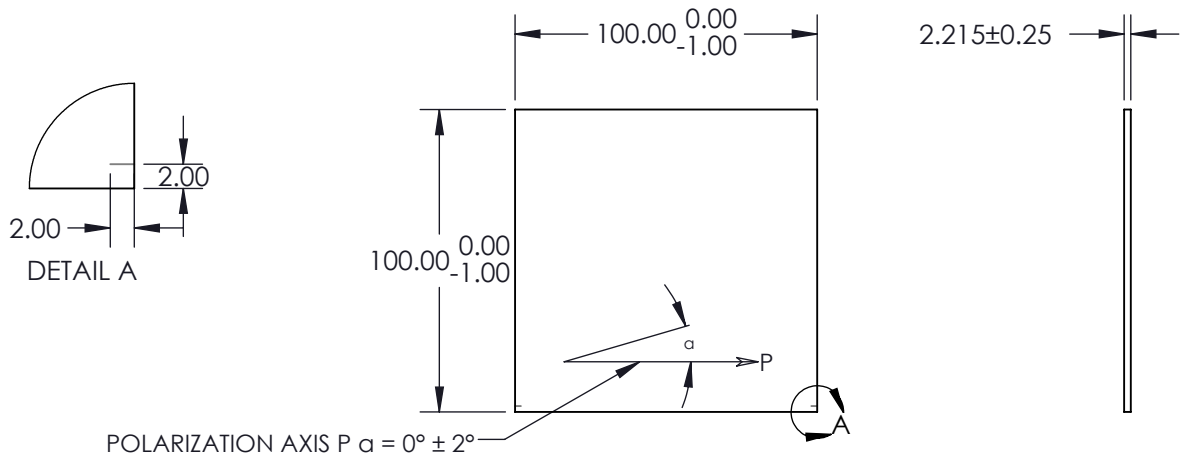


NOTES:

- 1. SUBSTRATE: PMMA
- 2. WAVELENGTH RANGE (nm): 400 - 700
- 3. EXTINCTION RATIO: 9000:1
- 4. OPERATING TEMPERATURE (°C): -40 to +80
- 5. TRANSMISSION (%):
  - Single: 42
  - Parallel: 36
  - Crossed: < 0.004
- 6. RoHS: COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

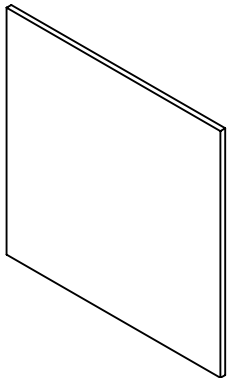

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO<sup>®</sup> Edmund Optics<sup>®</sup>**

THE POLARIZERS CONSISTS OF A POLYMER POLARIZATION  
FILM LAMINATED ONTO PMMA.

THIRD ANGLE PROJECTION		TITLE	100 x 100mm Linear Plastic Polarizer, Unmounted	
ALL DIMS IN	mm	DWG NO	86195	SHEET 1 OF 1