

## NOTES:

1. COATING (APPLY ACROSS COATING APERTURE) Enhanced Aluminum (200–11000nm) R(AVG) >85% @ 200 - 700nm R(AVG) >76% @ 700 - 1750nm R(AVG) >96% @ 1750 – 11000nm

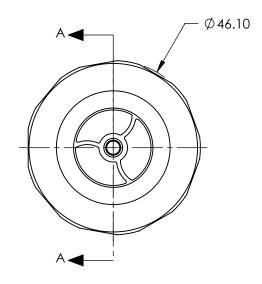

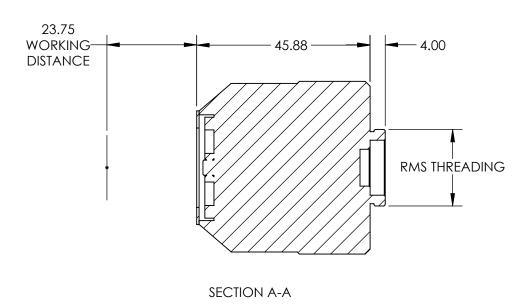

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

80	<sup>®</sup> Edmund	Optics®
F	nite Coniugate. UV Coat	ted. 15X/0.28NA HF

THIRD ANGLE PROJECTION	$\phi$	TITLE	Finite Conjugate, UV Coated, 15X/0.28 ReflX	NA HP
ALL DIMS IN	mm	DWG NO	59887	SHEET 1 OF 1