
## NOTES:

- 1. SUBSTRATE: FUSED SILICA
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN < 30 ARCSEC
- 3. COATING (APPLY ACROSS COATING APERTURE):
  - S1: NONE
  - S2: NONE
- 4. COMMERICAL POLISH
- 5. SURFACE QUALITY SPECIFCATIONS APPLY ACROSS CLEAR APERTURE.
- 6. CLEAR APERTURE AND COATING APERTURE ARE CENTERED ON SURFACES.
- SURFACE ROUGHNESS S1& S2: ≤ 1 Å RMS

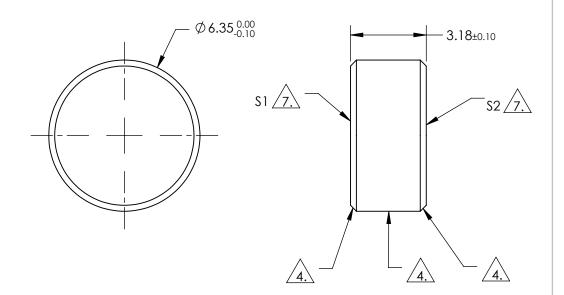

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	]			Edmund Optic	<b>C</b> ®
SHAPE	PLANO	PLANO					<i>.</i> 3
SURFACE ACCURACY AT 632.8nm (P-V)	0.05 WAVE	0.05 WAVE		1		6.35mm SUPERPOLISHED FS WINDOW	/ 1 Å
SURFACE QUALITY	10-5	10-5	THIRD ANGLE		TITLE		
CLEAR APERTURE	Ø5.72	Ø5.72		I			QUEET
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	11553	SHEET 1 OF 1