


NOTES:


1. MATERIAL: N-BK7
2. COATING TYPE: BARE ALUMINUM
3. BLAZE WAVELENGTH: 230nm
4. GROVE DENSITY (GROVES/mm): 1600
5. RoHS: COMPLIANT

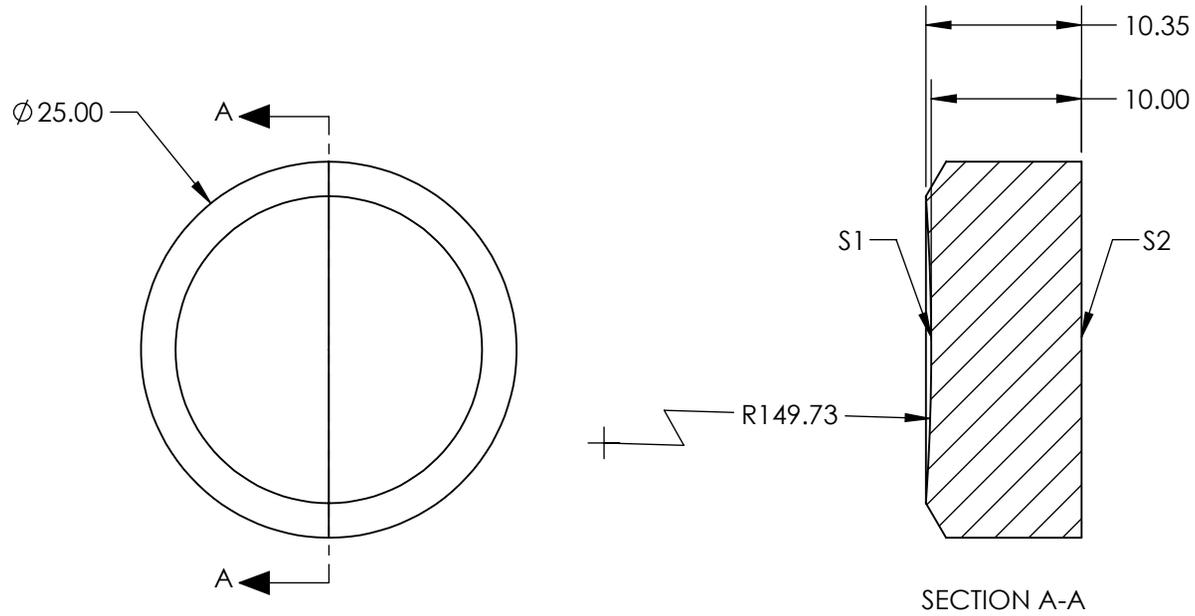

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® **Edmund Optics**®

	S1	S2	THIRD ANGLE PROJECTION 		TITLE	1600 GROOVES/mm, 25mm DIA., 230nm POLYCHROMATER CONCAVE DIFFRACTION GRATING	
SHAPE	CONCAVE	PLANO	ALL DIMS IN	mm	DWG NO	11540	SHEET 1 OF 1
DIFFRACTION AREA (mm)	Ø17.00	N/A					
BEVEL MAX FACE	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED					