
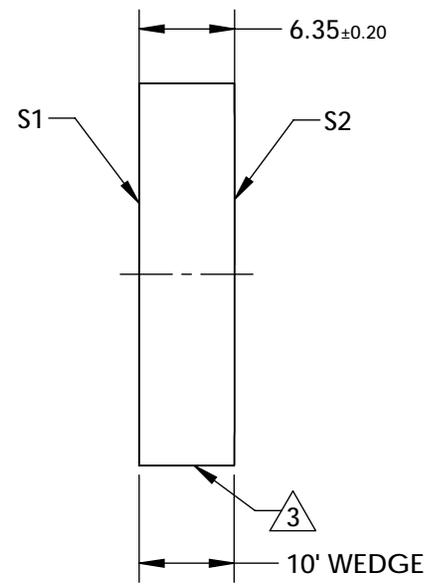


NOTES:

1. SUBSTRATE:
FUSED SILICA
2. COATING (APPLY ACROSS COATING APERTURE)
S1: R(AVG) >99% @ 740 - 860NM (7° AOI, P-POLARIZATION)
GOD: OFS² @ 740 - 860NM (7° AOI, P-POLARIZATION)

3. FINE GRIND SURFACE
4. ROHS COMPLIANT

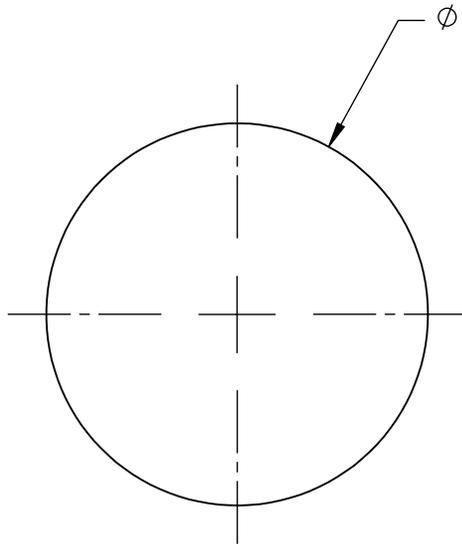

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
IRREGULARITY AT 632.8nm	λ/10	N/A
CLEAR APERTURE	∅ 20.32	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

Edmund Optics[®]

TITLE	25.4MM DIA., 740 - 860NM, THIRD ORDER DISPERSION (TOD) ULTRAFAST MIRROR		
DWG NO	17065		SHEET 1 OF 1