
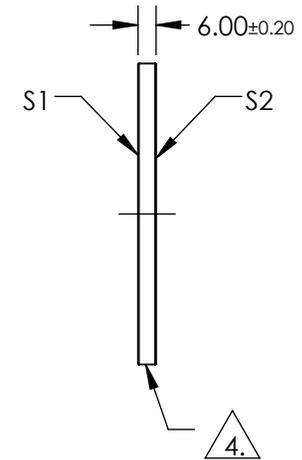
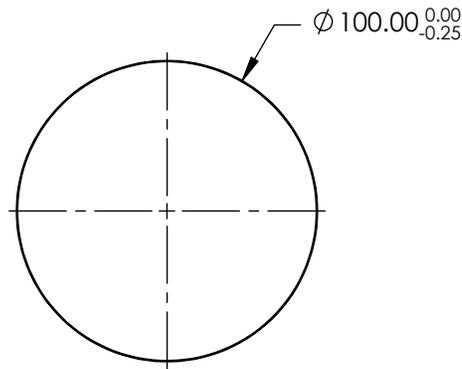


NOTES:

1. SUBSTRATE:
N-BK7
2. S2 TO BE PARALLEL TO S1 TO WITHIN <1 ARCMIN
3. COATING (APPLY ACROSS COATING APERTURE)
S1 & S2: VIS 0° (425-675nm)
R(AVG) ≤0.4% @ 425 - 675nm
4. FINE GRIND SURFACE
5. ROHS COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2				
SHAPE	PLANO	PLANO				
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION	TITLE	100mm DIA., 6mm THICK, VIS 0° COATED λ/4 N-BK7 WINDOW	
WAVELENGTH RANGE	425 - 675 nm	425 - 675 nm		ALL DIMS IN	mm	DWG NO
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED				SHEET 1 OF 1