NOTES:

1. SUBSTRATE:

SCHOTT KG3

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: NONE




4. DENSITY (g/cm³): 2.52

OPERATING TEMPERATURE (°C): 300 Maximum
REFLECTION FACTOR: 0.92

5. ROHS COMPLIANT

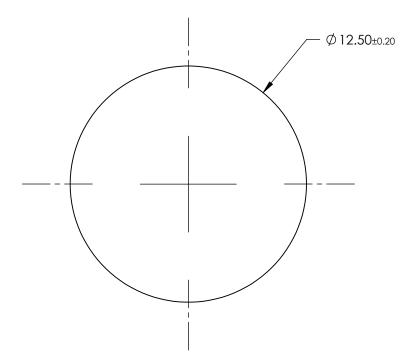

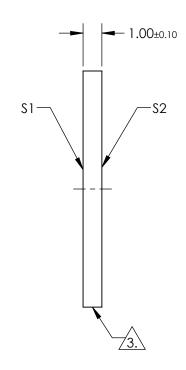

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

-		\$1	\$2	
	SHAPE	PLANO	PLANO	
	SURFACE QUALITY	60-40	60-40	
	REVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

_	1		•
	THIRD ANGLE PROJECTION	$\phi \lhd$	
	ALL DIMS IN	mm	[

Edmund Optics®
SCHOTT KG3, 12.5mm Dia., 1mm Thick,

reduction \downarrow			Colored Glass Heat Absorbing Snortpass Filte	
ALL DIMS IN	mm	DWG NO	18500	SHEET 1 OF 1