



NOTES:

1. SUBSTRATE: Fused Silica
2. RoHS: COMPLIANT
3. COATING (APPLY ACROSS COATING APERTURE)
 S1: R(ABS) > 99.80% @ 532nm @ 0-45° AOI

 DAMAGE THRESHOLD PULSED: 10J/cm² @ 20ns, 20Hz @ 532nm

 S2 & S3: NONE

△ 4. FINE GRIND SURFACE

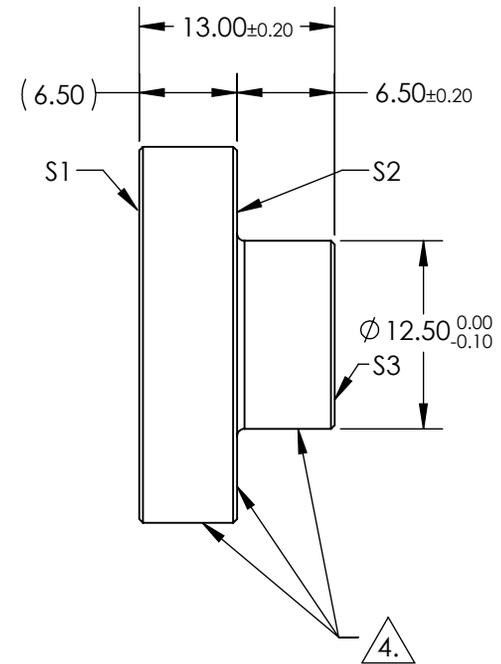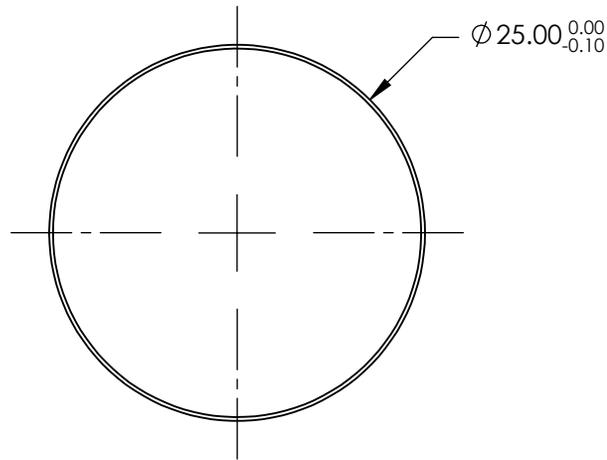

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	S3
SHAPE	PLANO	PLANO	PLANO
SURFACE QUALITY	10-5	FINE GRIND SURFACE	COMMERCIAL POLISH
CLEAR APERTURE	Ø 22.5	N/A	N/A
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



ALL DIMS IN

mm

EO® Edmund Optics®

TITLE

STEMMED LASER MIRROR, Ø25mm, 532nm

DWG NO

17557

SHEET
1 OF 1