
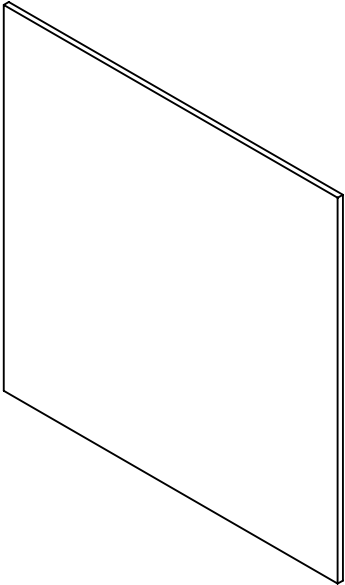
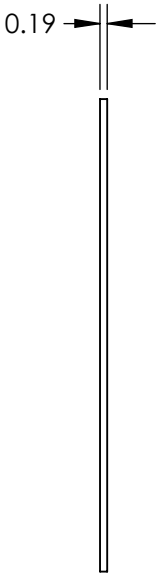



- NOTES:
- 1. SUBSTRATE: Aluminum Wires on COP
  - 2. EXTINCTION RATIO: >1415:1 (@ 0° AOI, 550nm)
  - 3. TRANSMISSION (%): 84.9 (Typical @ 550nm)
  - 4. WAVELENGTH RANGE: 400 - 1200 nm
  - 5. ORIENTATION OF AXIS: 0° ± 1.5°  
NOTCHES ON POLARIZING FILM DEPICT DIRECTION OF POLARIZATION DIRECTION
  - 6. RoHS3 COMPLIANT

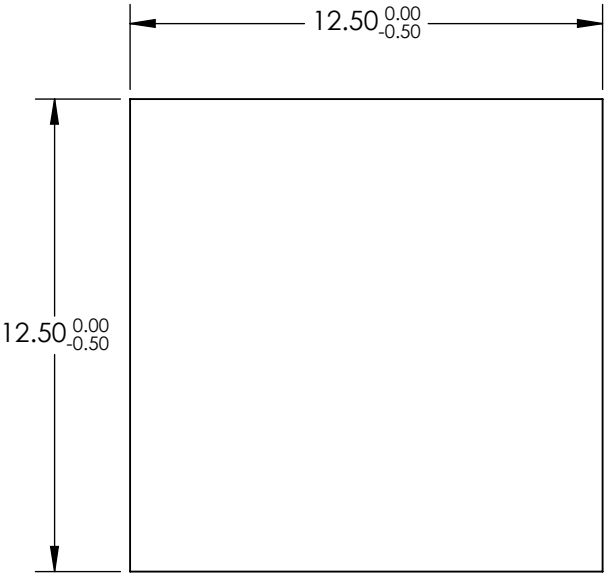

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

**EO<sup>®</sup> Edmund Optics<sup>®</sup>**

THIRD ANGLE PROJECTION 		TITLE	12.5 x 12.5 mm Stabilized Wire Grid Polarizing Film	
ALL DIMS IN	mm	DWG NO	20232	SHEET 1 OF 6