



NOTES:

1. SUBSTRATE:
Fused Silica
2. COATING (APPLY ACROSS COATING APERTURE):
S1 & S2: R(ABS) \leq 1.5% FROM 750-800nm
R(ABS) \leq 1.0% FROM 800-1550nm
R(AVG) \leq 0.7% FROM 750-1550nm
3. EFFECTIVE FOCAL LENGTH: 5.1mm
4. DIVERGENCE ANGLE: $\pm 1.6^\circ$
5. WAVELENGTH RANGE (nm): 750 - 1550
6. ROHS: COMPLIANT

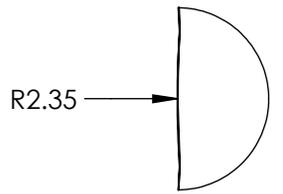

DETAIL A

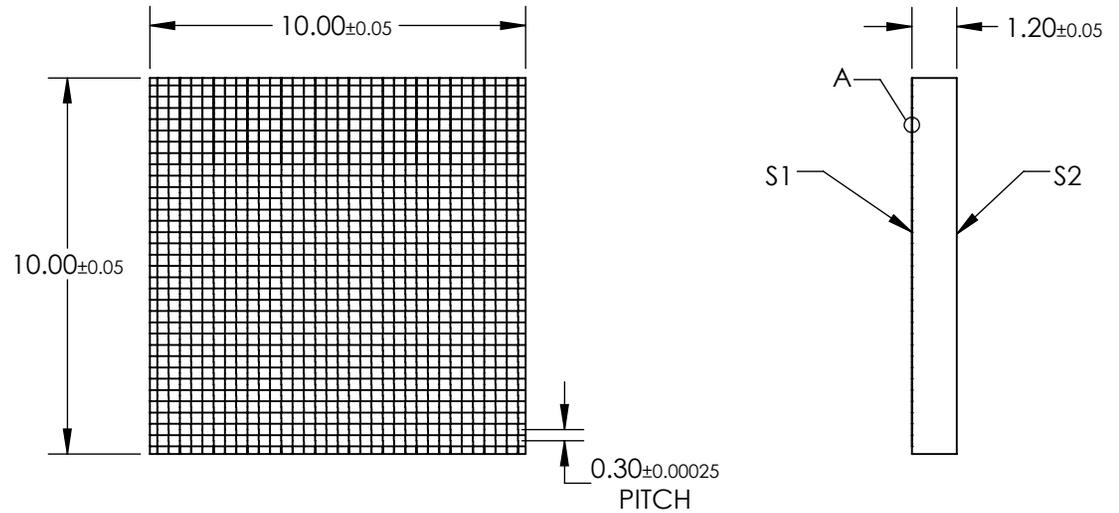

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 300µm Pitch, 1.6° Divergence, NIR II Coated	
ALL DIMS IN	mm	DWG NO	21151	SHEET 1 OF 1