



NOTES:

- 1. SUBSTRATE:
Fused Silica
- 2. COATING (APPLY ACROSS COATING APERTURE):
S1 & S2: R(ABS) ≤ 1.5% FROM 750-800nm
R(ABS) ≤ 1.0% FROM 800-1550nm
R(AVG) ≤ 0.7% FROM 750-1550nm
- 3. EFFECTIVE FOCAL LENGTH: 4.8mm
- 4. DIVERGENCE ANGLE: ±0.25 °
- 5. WAVELENGTH RANGE (nm): 750 - 1550
- 6. ROHS: COMPLIANT



DETAIL A

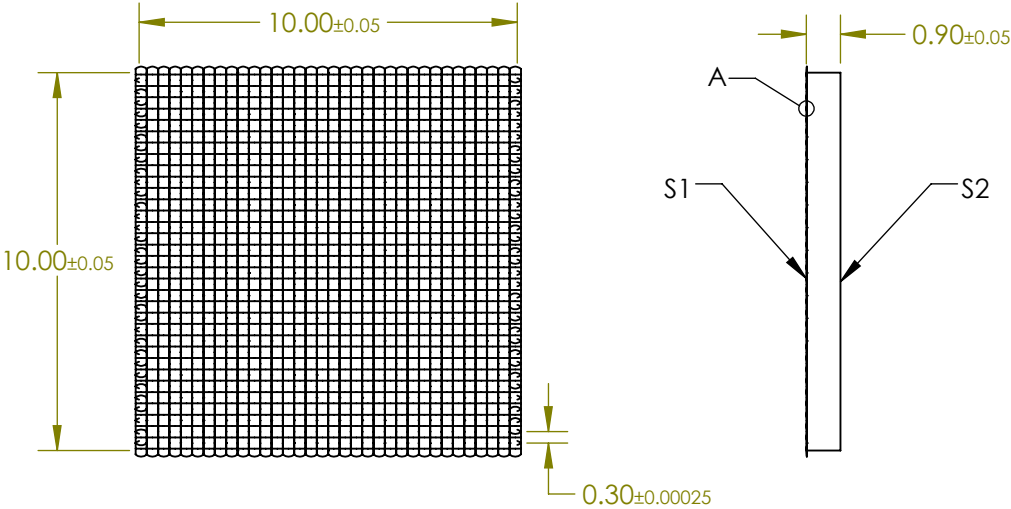

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

<div><div>Edmund Optics®</div></div>			
<div>THIRD ANGLE PROJECTION</div>		TITLE	
ALL DIMS IN		DWG NO	
mm		21153	
		SHEET 1 OF 1	

Microlens Array 10 x 10mm, 300µm Pitch, 2° Divergence, NIR II Coated