

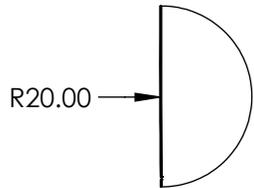


NOTES:

1. SUBSTRATE:  
Fused Silica
2. COATING (APPLY ACROSS COATING APERTURE):  
S1 & S2: R(ABS) ≤ 1.5% FROM 750-800nm  
R(ABS) ≤ 1.0% FROM 800-1550nm  
R(AVG) ≤ 0.7% FROM 750-1550nm
3. EFFECTIVE FOCAL LENGTH: 46.7mm
4. DIVERGENCE ANGLE: ±0.25 °
5. WAVELENGTH RANGE (nm): 750 - 1550
6. ROHS: COMPLIANT

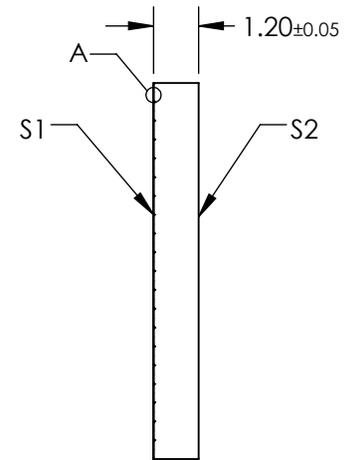

DETAIL A

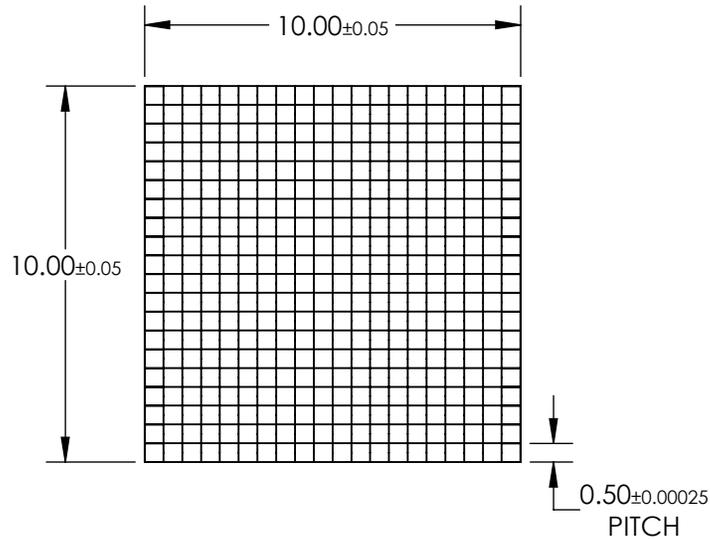

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 500µm Pitch, 0.25° Divergence, NIR II Coated	
ALL DIMS IN	mm	DWG NO	21155	SHEET 1 OF 1