
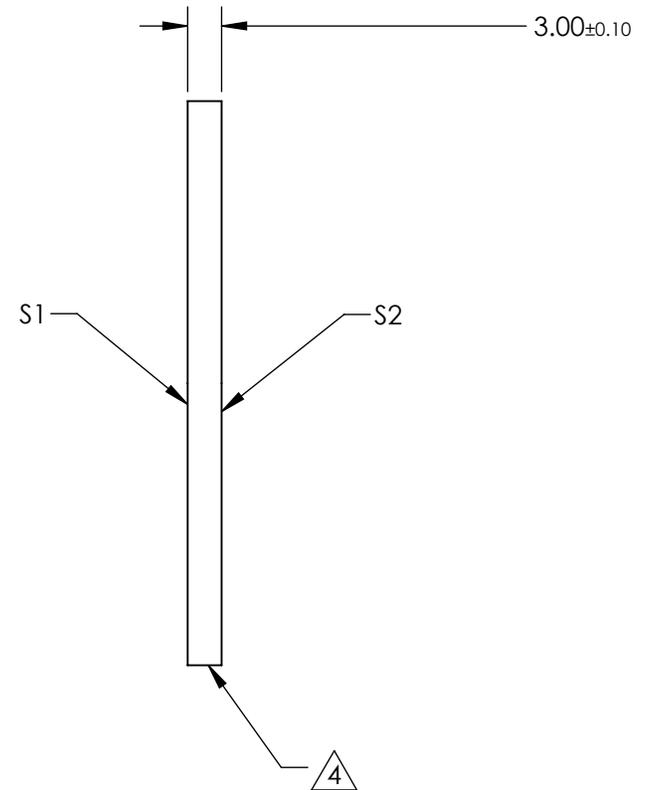
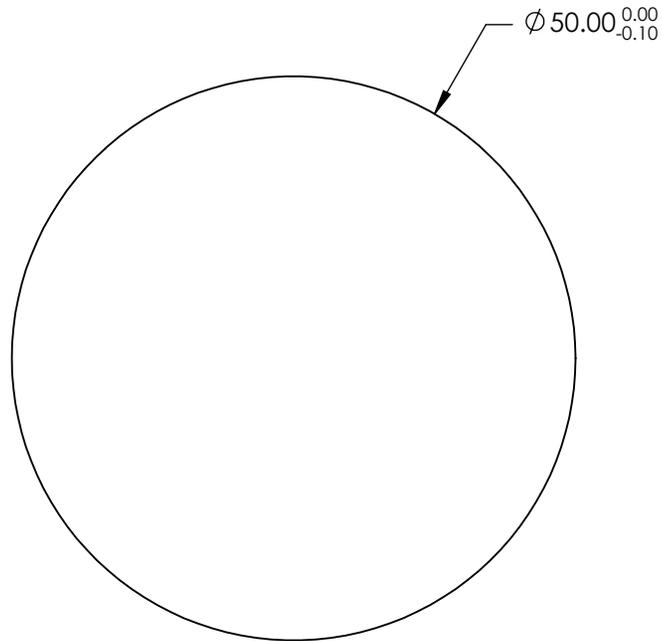


NOTES:

1. SUBSTRATE:  
Barium Fluoride (BaF<sub>2</sub>)
2. SURFACE S2 TO BE PARALLEL WITH S1 TO <3
3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: BBAR (2000-5000nm)
4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	$\varnothing 45.00$	$\varnothing 45.00$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

Edmund Optics®

TITLE

50mm Dia. x 3mm Thick, BBAR (2000-5000nm)  
Coated Barium Fluoride Window

DWG NO

23531

SHEET  
25 OF 28