
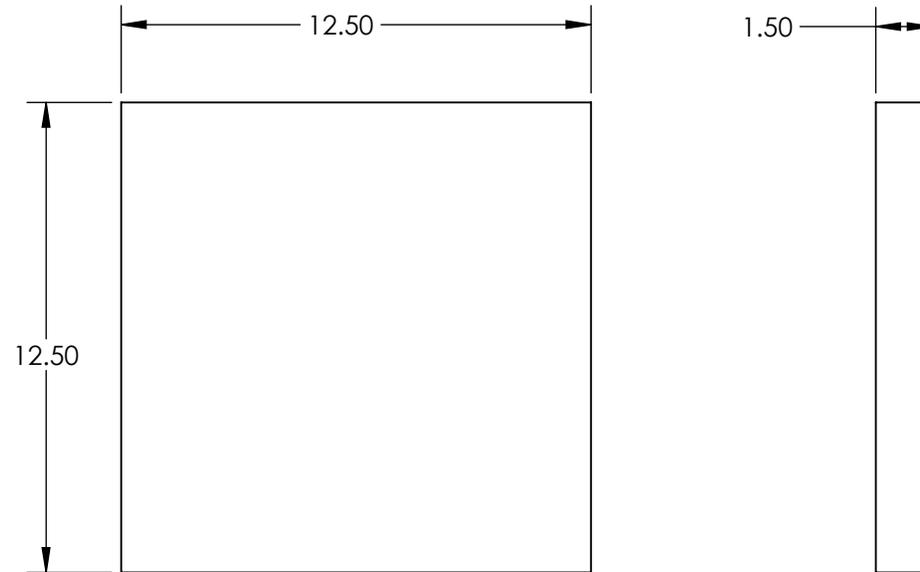


NOTES:

1. SUBSTRATE:
FUSED SILICA
2. SURFACE S2 TO BE PARALELL TO SURFACE S1 TO WITHIN <5 ARCSEC
3. COATING (APPLY ACROSS CLEAR APERTURE)

Rabs ≤1.5% @ 750 - 800nm
 Rabs ≤1.0% @ 800 - 1550nm
 Ravg ≤0.7% @ 750 - 1550nm

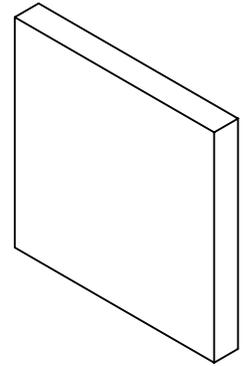

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |
|-----------------|---------------------|---------------------|
| SHAPE | PLANO | PLANO |
| SURFACE QUALITY | 20-10 | 20-10 |
| CLEAR APERTURE | 11.25 x 11.25 | 11.25 x 11.25 |
| BEVEL | PROTECTED AS NEEDED | PROTECTED AS NEEDED |



ALL DIMS IN mm

EO® Edmund Optics®

TITLE 12.5mm Sq., 1.5mm Thick, NIR II Coated λ/10 Fused Silica Window

DWG NO 24300 SHEET 5 OF 24