
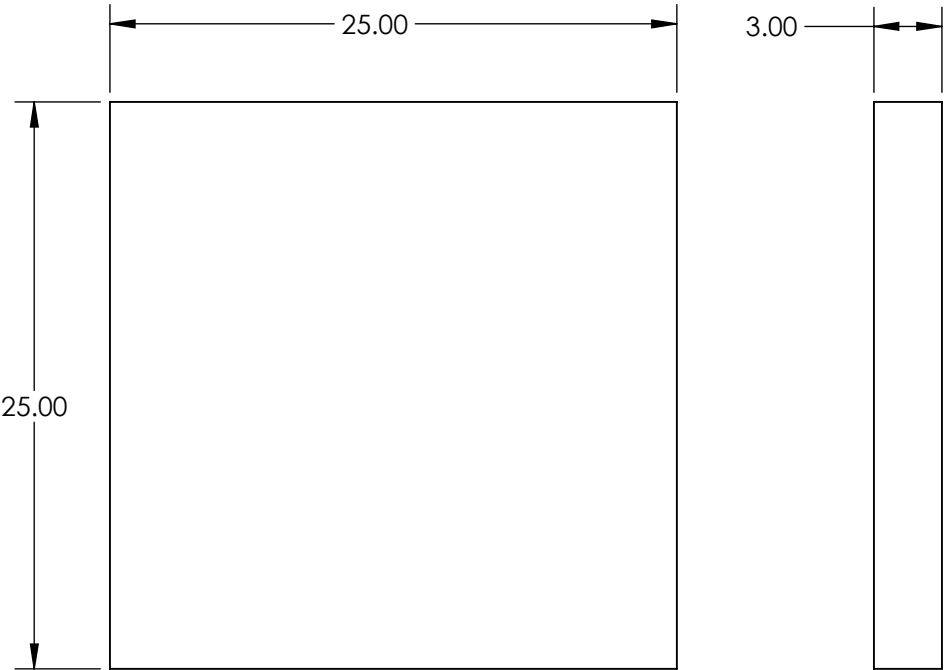


NOTES:

- 1. SUBSTRATE:
FUSED SILICA
- 2. SURFACE S2 TO BE PARALELL TO SURFACE S1 TO WITHIN <5 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

Rabs <0.25% @ 532nm
Rabs <0.25% @ 1064nm
Ravg <1.0% @ 500 - 1100nm




FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	22.50 x 22.50	22.50 x 22.50
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE
PROJECTION

ALL DIMS INmm

 Edmund Optics®

TITLE

25mm Sq., 3mm Thick, YAG-BBAR Coated
λ/10 Fused Silica Window

DWG NO

24311

SHEET

16 OF 24