NOTES:

1. SUBSTRATE:


FUSED SILICA


2. COATING (APPLY ACROSS CLEAR APERTURE)

S1: Ravg >98% @ 750 - 1100nm (0 - 45°) Ravg >99% @ 750 - 1100nm (0°)

S2: NONE



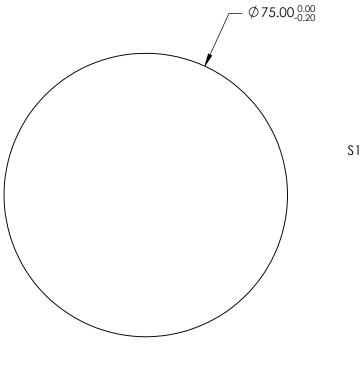

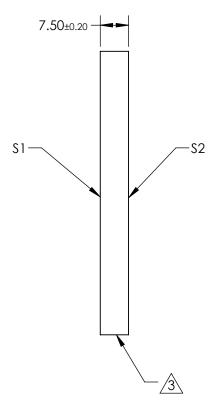

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
CLEAR APERTURE	Ø 67.5	N/A
SURFACE QUALITY	20-10	COMMERCIAL POLISH
SURFACE FLATNESS	λ/10 (BEFORE COATING)	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

	Edmund	Optics®
--	--------	---------

THIRD ANGLE PROJECTION	$\phi \Box$	TITLE	75mm Dia. 750 - 1100nm Broadband Mirror	λ/10
ALL DIMS IN	mm	DWG NO	24049	SHEET 3 OF 3